


User Manual

Battery operational and storage principles

- Do not put batteries in contact with conductive materials, water, fire, or strong acids.
- Avoid excessively hot and humid conditions, especially when batteries are fully charged.
- Do not place batteries in direct sunlight, on hot surfaces or in hot locations.
- To ensure the best performance of battery, always charge the battery after certain operating time.
- Never leave a battery pack unobserved during charging.
- Do not discharge the battery completely (at least 40% electricity left).
It will cause shorter life time of the battery.
- Do not use or charge the battery if it hasn't been used over a year.
- Do not overcharge the battery. It will lead to battery damages if keeps charging for days.
- Do not use broken or damaged charger.

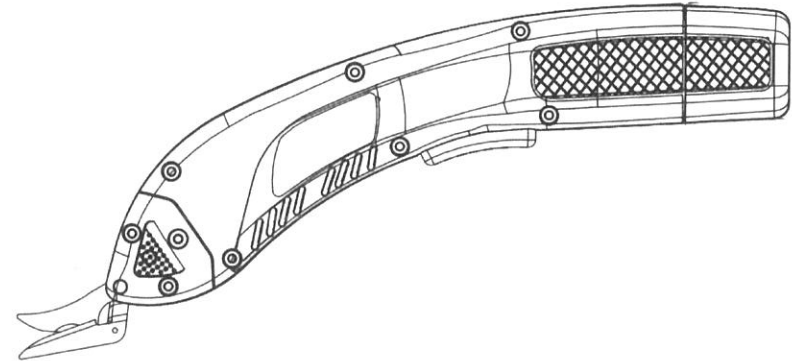

Electrical Cutter

MEC-1

Knife assembly is installed and fastened with 2 screws and can be easily replaced with a screwdriver.

Battery Assembly has several safety monitoring devices inside.


High temperature caused by surge current or environment temperature will be detected. The device will stop the battery working immediately.

Red Light: Battery is under charging

Green Light: Battery is fully charged.

Type C connector: ideally 5V, 2A input power supply.



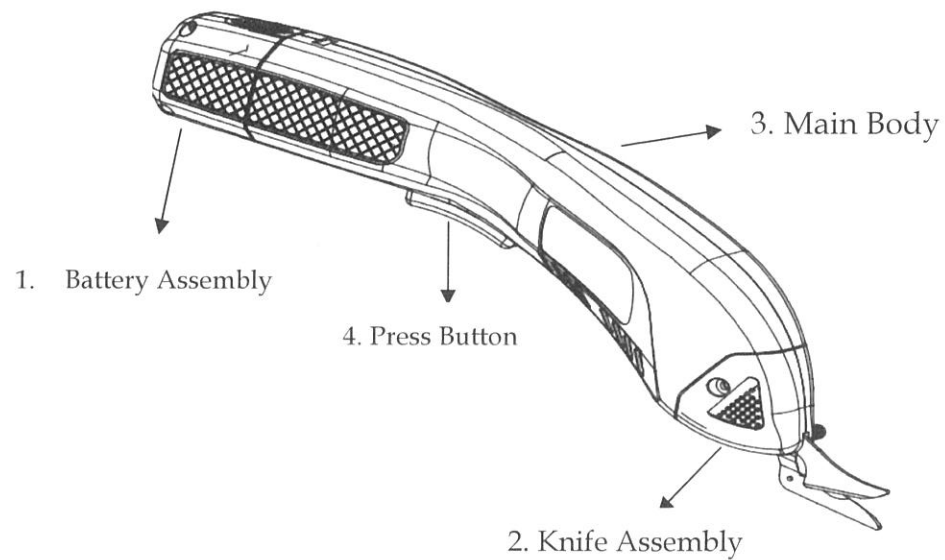

Model No.	MEC-1
RPM	1500 r/Min ±15%
Cutting Height	≤ 10mm
Input V/C	5V, 2A
Power Supply Specification	AC 100V ~ 240V 50 ~ 60 Hz
Battery Cap	21700/ 4600mAh; 3.7V DC
Net Weight	390g

	零件名稱	Item
1	電池整組	Battery Asembly
2	刀頭	Knife Assembly
3	電剪本體	Main Body
4	按鍵	Press Button
5	充電器	Charger
6	馬達	Motor set

